
Honeywell BW™ Flex

Portable Multi-Gas Detector



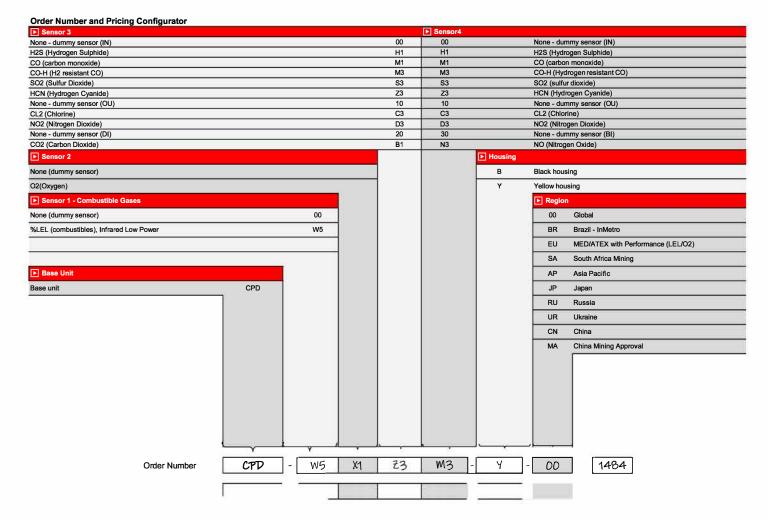

^{*}IR LEL sensors do not detect hydrogen, should not be used in presence of acetylene, and they are not recommended for potentially condensing atmospheres. Use catalytic LEL sensors.

*Honeywell Analytics recommends using a combustible (LEL) sensor only when accompanied by an oxygen (O₂) sensor. As oxygen is required for the detection of combustible gases, a
Catalytic LEL sensor may not detect combustible hazards in an oxygen deprived environment. IR LEL Sensors are better suited to oxygen deprived environments

Service Made Simple

Platinum Service is calculated at 40% of ATO Price

^{*}For further information regarding the effectiveness and suitability of the types of LEL combustibles sensors for your target gas and application, please refer to the LEL sensor information page within the Price Guide or alternatively contact your local Honeywell Sales Representitive.